



360-degree Network Camera featuring *Super Dynamic*

Key Features

- 360° monitoring with a wide variety of transmission modes: Panorama, Double Panorama, Quad PTZ, Single PTZ, and Quad streams (H.264/VGA)
- 1080p Full HD images up to 30 fps.
- Combining enhanced “UniPhier™”, Panasonic’s proprietary System LSI platform and **2 areas VIQS** (Variable Image Quality on Specified area) function can decrease maximum 50%¹ network bandwidth.
- Multiple H.264 (High profile) streams and JPEG streams ensure simultaneous real time monitoring and high resolution recording by enhanced “UniPhier™”.
- Smooth PTZ operation without mechanical action
- Built-in distortion correction function
- A fisheye lens control function realizes intelligible screen operation intuitively.
- Smartphone monitoring : Direct camera control from smartphone
- **Super Dynamic** and ABS (Adaptive Black Stretch) technologies deliver 128x wider dynamic range compared to conventional cameras.
- High sensitivity with Day/Night (Electrical) function: 1.5 lx (Color), 1.2 lx (B/W) at F2.4
- Digital Noise Reduction: 3D-DNR ensures noise reduction in various conditions.
- With the Intelligent Resolution technology, 3 areas - outlines, detailed texture areas and soft gradation areas - are automatically detected and optimum signal processes are performed to each area. Apart from the uniform enhancement of sharpness, the innovative technology Intelligent Resolution precisely performs signal processing pixel by pixel in the most effective way for it. As a result, images are naturally clear and crisp suitable for all surveillance applications.
- Progressive scan ensures clear images with less motion blur and no tearing even when the subject is moving.
- Superior color reproduction by primary (RGB) color filter.
- Electronic sensitivity enhancement: Auto (Up to 16x) / OFF
- Selectable light control modes: Indoor scene (50 Hz) / Indoor scene (60 Hz) / ELC (maximum exposure time)
Indoor scene (50 Hz/60Hz): Flicker caused by fluorescent lightning will be automatically compensated.
ELC (maximum exposure time): The lightning control will be automatically performed by adjusting shutter speed in the range of ELC.
- VMD (Video Motion Detector) with 4 programmable detection areas, 15 steps sensitivity level and 10 steps detection size
- Face detection function detects the position of human face and the information is sent by XML or video stream.
- Privacy Zone can mask up to 4 private areas, such as house windows and entrances/exits.

- Camera title display: Up to 20 alphanumeric characters on the browser
- Alarm sources including 3 terminal input, VMD and Panasonic alarm command can trigger actions such as SDXC/ SDHC/SD memory recording, FTP image transfer, E-mail notification, Indication on browser, Alarm terminal output, and Panasonic protocol output.
- Full duplex bi-directional audio allows interactive communication between camera site and monitoring site.
- JPEG image compression ratio can be changed by alarm so that higher quality image can be provided.
- Prioritized stream control: One of the video streams can be prioritized when multiple recorders or client PCs are accessing the camera so that the recorder or the client PC can maintain the frame rate.
- SDXC/SDHC/SD Memory card slot for manual recording (H.264 / JPEG), alarm recording (H.264 / JPEG) and backup upon network failure (JPEG)
- H.264 max. bit rate/client and Total bit rate control allows flexible network traffic management. Frame rate priority mode controls bit rate and compression ratio to provide the specified frame rate.
- Internet mode: H.264 images can be transmitted over HTTP protocol.
- Multi-language: English / Italian / French / German / Spanish / Russian / Chinese / Japanese
- IPv4/IPv6 protocol supported
- Supports SSL, DDNS (viewnetcam, RFC2136)
- Still images (JPEG) can be viewed on mobile phones via Internet.
- Operating temperature -10 °C ~ +50 °C (-14 °F ~ 122 °F)
- Low profile design for discrete installation

¹ Compared with WV-NP502, reduction effect is decreased by object and image quality setting conditions

Standard Accessories

• Installation Guide.....	1 pc.	• Code label ²	1 pc.
• CD-ROM ¹	1 pc.	• Installation template label.....	1 pc.

The following is used during installation procedures:

• Camera attachment.....	1 pc.	• Installation template label.....	1 pc.
• Audio cable.....	1 pc.	• Cable tie	2 pcs. (incl. 1 spare)
• Power cord plug	1 pc.	• Rubber feet.....	4 pcs. (incl. 1 spare)
• External I/O terminal plug	1 pc.		

¹ The CD-ROM contains the operating installations and installation guide (PDF).

² This label may be required for network management. The network administrator shall retain the code label.

Optional Accessory

Ceiling Mount Bracket
WV-Q105
(E models only)



Specifications

TV System		NTSC	PAL	
Camera				
Image Sensor	1/3 type MOS Sensor			
Effective Pixels	Approx. 3.1 megapixels			
Scanning Mode	Progressive			
Scanning Area	4.51 mm (H) x 3.38 mm (V) (3/16 inches (H) x 1/8 inches (V))			
Minimum Illumination	Color: 1.5 lx (F2.4, Auto slow shutter: Off (1/30s, Gain:On(High)) Color: 0.1 lx (F2.4, Auto slow shutter: Max. 16/30s, Gain:On(High)) *1 BW: 1.2 lx (F2.4, Auto slow shutter: Off (1/30s, Gain:On(High)) BW: 0.08 lx (F2.4, Auto slow shutter: Off (16/30s, Gain:On(High)) *1			
White Balance	AWC (2,000 ~ 10,000 K), ATW1 (2,700 ~ 6,000 K), ATW2 (2,000 ~ 6,000 K)			
Light Control Mode	Indoor scene (50 Hz / 60 Hz) / ELC			
Shutter Speed	With Super Dynamic On ELC (1/30 s) With Super Dynamic Off ELC (1/30 s), ELC (3/100 s), ELC (3/120 s), ELC (2/100 s), ELC (2/120 s), ELC (1/100 s), ELC (1/120 s), ELC (1/250 s), ELC (1/500 s), ELC (1/1,000 s), ELC (1/2,000 s), ELC (1/4,000 s), ELC (1/10,000 s)			
Super-Dynamic	ON / OFF			
Dynamic Range	52 dB typ. (only at Super-Dynamic On)			
Adaptive Black Stretch	On/Off (only at Super-Dynamic Off)			
AGC	ON (HIGH) / ON (MD) / ON (LOW) / OFF			
Electronic Sensitivity UP	OFF (1/30 s), Max. 2/30 s, Max. 4/30 s, Max. 6/30 s, Max. 10/30 s, Max. 16/30 s			
Day & Night(electrical)	OFF / AUTO			
Digital Noise Reduction	HIGH / LOW			
Video Motion Detection	ON / OFF, 4 areas available			
Video analytics Face Detection	Off/On/On with face frame display However, face detection is not supported when "Fisheye" or "Quad streams" is selected for the image type.			
Auto mode:	Auto pan/ Preset sequence Auto mode can only be used when the image type is Quad PTZ or Single PTZ.			
Self return:	10 s/ 20 s/ 30 s / 1 min/ 2 min/ 3 min/ 5 min/ 10 min/ 20 min/ 30 min/ 60 min Self return can only be used when the image type is Quad PTZ or Single PTZ.			
Privacy Zone	ON / OFF (up to 4 zones available)			
VIQS	On/Off (up to 2 areas available) However, the VIQS function is not supported when "Quad PTZ", "Single PTZ" or "Quad streams" are selected.			
Camera Title (OSD)	Up to 20 characters (alphanumeric characters, marks), On/Off However, you can specify characters to be displayed on each of the four screens when "Quad streams" is selected.			
Lens				
Focal Length	0.837 mm			
Angular Field of View	Horizontal: 188 °, Vertical: 181 °			
Maximum Aperture Ratio	1:2.4 (Fixed)			
Focusing Range	0.3 m ~ ∞			
Browser GUI				
Camera Control	Pan/Tilt/Digital Zoom, Preset, Auto Mode, Self Return, Fisheye Control, Brightness, AUX ON / OFF			
Display Mode	Spot, Quad: Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available.			
Digital Zoom	1x, 2x, 4x controlled by browser GUI (Panorama, Double Panorama, Fisheye mode) 1x ~ 4x (Quad PTZ or Single PTZ mode)			
Camera Title	Up to 20 alphanumeric characters			
Clock Display	Time: 12H/24H, Date: 5 formats on the browser, Summer time (Manual)			
Alarm Control	Reset			
One Shot Capture	A still picture will be displayed on a newly opened window.			
Audio	Mic (Line) Input: On / OFF Volume adjustment: Low / Middle / High, Audio Output: On / OFF Volume adjustment: Low / Middle / High			
SD Memory Data Download	Still or motion images recorded in the SDXC/SDHC/SD memory card can be downloaded.			
GUI/Setup Menu Language	English, Italian, French, German, Spanish, Russian, Chinese, Japanese			
System Log	Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG) error logs			
Supported OS *2 *3	Microsoft® Windows® 7, Microsoft® Windows® Vista®, Microsoft® Windows® XP SP3			
Supported Browser	Windows® Internet Explorer® 9.0 (32 bit), Windows® Internet Explorer® 8.0 (32 bit), Windows® Internet Explorer® 7.0 (32 bit), Microsoft® Internet Explorer® 6.0 SP3			
Network				
Network IF	10Base-T / 100 Base-TX, RJ-45 connector (female)			
Image Resolution *4	2M Panorama[16:9]: 2M Double Panorama [16:9]: 1M Panorama [16:9]: 1M Double Panorama [16:9]: Panorama + Quad PTZ / Panorama + Single PTZ / Double Panorama + Quad PTZ / Double Panorama + Single PTZ: VGA Quad streams	H.264(1): 1920x1080 / 640x360 / 320x180, up to 30 fps H.264(2): 640x360 / 320x180, up to 30 fps JPEG: 1920x1080 / 640x360 / 320x180, up to 30 fps H.264(1): 1280x720 / 640x360 / 320x180, up to 30 fps H.264(2): 640x360 / 320x180, up to 30 fps JPEG: 1280x720 / 640x360 / 320x180, up to 30 fps • When using distribution of "Panorama" or "Double panorama" H.264(1): 1920x1080 / 640x360 / 320x180, up to 15 fps JPEG: 1920x1080 / 640x360 / 320x180, up to 15 fps • When using distribution of "Quad PTZ" or "Single PTZ" H.264(2): 1280x960 / 640x480 / 320x240, up to 15 fps JPEG: 1280x960 / 640x480 / 320x240, up to 15 fps	AUX ON / OFF A still picture will be displayed on a newly opened window. However, face detection is not supported when "Fisheye" or "Quad streams" is selected for the image type. Pan/Tilt/Digital Zoom, Preset, Auto Mode, Self Return, Fisheye Control, Brightness, AUX ON / OFF Spot, Quad: Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. 1x, 2x, 4x controlled by browser GUI (Panorama, Double Panorama, Fisheye mode) 1x ~ 4x (Quad PTZ or Single PTZ mode) Up to 20 alphanumeric characters Time: 12H/24H, Date: 5 formats on the browser, Summer time (Manual) Reset A still picture will be displayed on a newly opened window. Mic (Line) Input: On / OFF Volume adjustment: Low / Middle / High, Audio Output: On / OFF Volume adjustment: Low / Middle / High Still or motion images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Russian, Chinese, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG) error logs Microsoft® Windows® 7, Microsoft® Windows® Vista®, Microsoft® Windows® XP SP3 Windows® Internet Explorer® 9.0 (32 bit), Windows® Internet Explorer® 8.0 (32 bit), Windows® Internet Explorer® 7.0 (32 bit), Microsoft® Internet Explorer® 6.0 SP3	
3M Fisheye [4:3]:	H.264(1): 1280x960, up to 15 fps JPEG: 2048x1536, up to 15 fps			
1.3M Fisheye [4:3]:	H.264(1): 1280x960 / 640x480 / 320x240, up to 30 fps H.264(2): 640x480 / 320x240, up to 30 fps JPEG: 1280x960 / 640x480 / 320x240, up to 30 fps			
H.264	Transmission Mode Frame Rate Bit Rate/Client Image Quality Refresh Interval Transmission Type	Constant bitrate / Frame rate priority / Best effort 1 / 3 / 5 / 7.5 / 10 / 12 / 15 / 20 / 30 fps 64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 1,536 / 2,048 / 3,072 / 4,096 / 8,192 / 10,240 / 12,288 / 14,336 kbps LOW / NORMAL / FINE 0.2 / 0.25 / 0.3 / 0.5 / 1 / 2 / 3 / 4 / 5 s UNICAST / MULTICAST	There are specific limitation such as the SD memory card function being unavailable. • Only for H.264 images. • There are specific limitation such as the SD memory card function being unavailable. 1 / 3 / 5 / 7.5 / 10 / 12 / 15 / 20 / 30 fps 64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 1,536 / 2,048 / 3,072 / 4,096 / 8,192 / 10,240 / 12,288 / 14,336 kbps LOW / NORMAL / FINE 0.2 / 0.25 / 0.3 / 0.5 / 1 / 2 / 3 / 4 / 5 s UNICAST / MULTICAST	
JPEG	Image Quality Refresh Interval Transmission Type	10 steps 0.1 fps ~ 30 fps PULL / PUSH	G.726 (ADPCM) 32 kbps / 16 kbps, G.711 64 kbps OFF / Mic (Line) input / Audio output / Interactive (Half duplex) / Interactive (Full duplex) Level 1 only / Level 2 higher / All users 64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 2,048 / 4,096 / 8,192 kbps / Unlimited IPv6: TCP/IPv6, UDP/IPv6, HTTP, HTTPS, SMTP, DNS, NTP, SNMP, DHCPv6, MLD, ICMP, ARP IPv4: TCP/IPv4, UDP/IPv4, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DONS, NTP, SNMP, UPnP, ICMP, ICMP, ARP G.726 recording: Manual REC / Alarm REC / Post / Backup upon network failure Compatible SD (SDHC/SDXC) card: Panasonic 1 GB, 2 GB, 4 GB*, 8 GB, 16 GB*, 32 GB*, 64 GB** model SDHC card, ** SDXC card (except miniSD card and microSD card)	G.726 (ADPCM) 32 kbps / 16 kbps, G.711 64 kbps OFF / Mic (Line) input / Audio output / Interactive (Half duplex) / Interactive (Full duplex) Level 1 only / Level 2 higher / All users 64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 2,048 / 4,096 / 8,192 kbps / Unlimited IPv6: TCP/IPv6, UDP/IPv6, HTTP, HTTPS, SMTP, DNS, NTP, SNMP, DHCPv6, MLD, ICMP, ARP IPv4: TCP/IPv4, UDP/IPv4, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DONS, NTP, SNMP, UPnP, ICMP, ICMP, ARP G.726 recording: Manual REC / Alarm REC / Post / Backup upon network failure Compatible SD (SDHC/SDXC) card: Panasonic 1 GB, 2 GB, 4 GB*, 8 GB, 16 GB*, 32 GB*, 64 GB** model SDHC card, ** SDXC card (except miniSD card and microSD card)
FTP Client		Alarm image transmission, FTP periodic transmission (When the FTP transmission is failed, backup on an optional SD memory card is available.)		
No. of Simultaneous Users	Up to 14 users (Depends on network conditions)			
SDXC/SDHC/SD Memory Card (Option)	H.264 recording: Manual REC / Alarm REC / Post / Backup upon network failure Compatible SD (SDHC/SDXC) card: Panasonic 1 GB, 2 GB, 4 GB*, 8 GB, 16 GB*, 32 GB*, 64 GB** model			

TV System		NTSC	PAL
Network	Face Detection	ON / ON with face frame display / OFF (with XML notification) ***M Fisheye [4:3], "1.3M Fisheye [4:3]", and "VGA Quad streams" modes cannot use the Face Detection function.	
	Cellular Phone Compatibility	JPEG IMAGE, AUX control (by access level)	
	Mobile Terminal Compatibility	iPad, iPhone, iPod touch (iOS 4.2.1 or later) Android™ mobile terminals	
Alarm	Alarm Source	3 terminals input, VMD, Command alarm	
	Alarm Actions	SDXC/SDHC/SD memory recording, E-mail notification, Indication on browser, FTP image transfer, Panasonic protocol output	
	Alarm Log	With SDXC/SDHC/SD memory card: 5,000 logs, without SDXC/SDHC/SD memory card: 1,000 logs	
	Schedule	Alarm / VMD / Access permission / H.264 recording	
Input/Output	Microphone/Line Input	Internal microphone: ø3.5 mm monaural mini jack, Input impedance: Approx. 2 kΩ For microphone input For line input	
		Applicable microphone: Plug-in power type, Supply voltage: 2.5 V ±0.5 V	
	Audio Output	Input level: Approx. -10 dBV ø3.5 mm stereo mini jack (monaural output), Output impedance: Approx. 600 Ω, Line level	
	External I/O Terminals	ALARIN IN 1, ALARM IN 2 / ALARM OUT, ALARM IN 3 / AUX OUT (x1 for each)	
General	Mounting method	Ceiling/ Wall/ Tripod	
	Safety/EMC Standard	UL (UL60950-1), FCC (Part15 Class A), CE, IEC60950-1 C-UL (CAN/CSA C22.2 No.60950-1), (EN55022 Class B, EN55024) DOC (ICES030 Class A)	
	Power Source and Power Consumption	12V DC, PoE (IEEE802.3af compliant) 12 V DC: 540 mA/ 6.5 W PoE 48 V: 125 mA/ 6.0 W (Class 2 devices) *FOR UL LISTED MODEL(S), ONLY CONNECT 12 V DC CLASS 2 POWER SUPPLY.	
	Ambient Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)	
	Ambient Operating Humidity	Less than 90 % (no condensation)	
	Dimensions	ø150 mm x 44 mm (H) - [ø29/32 inches x 1-23/32 inches (H)]	
	Mass (approx.)	Main body: Approx. 370 g (0.82 lbs) Camera attachment: Approx. 90 g (0.20 lbs)	
	Finish	Main body: ABS resin, sail white	


*1 Converted value

*2 Refer to "Notes on Windows Vista® / Windows® 7" on the provided CD-ROM for further information about system requirements for a PC and precautions when using Microsoft® Windows® 7 or Microsoft® Windows Vista®.
*3 When using IPv6 for communication, use Microsoft® Windows® 7 or Microsoft® Windows Vista®.


*3 When using IPv6 for communication, use Microsoft® Windows® 7 or Microsoft® Windows Vista®.
*4 Transmission for 2 streams can be individually set in the same compression method.

*4 Transmission for 2 streams can be individually set in the same compression method.

Part Names and Functions

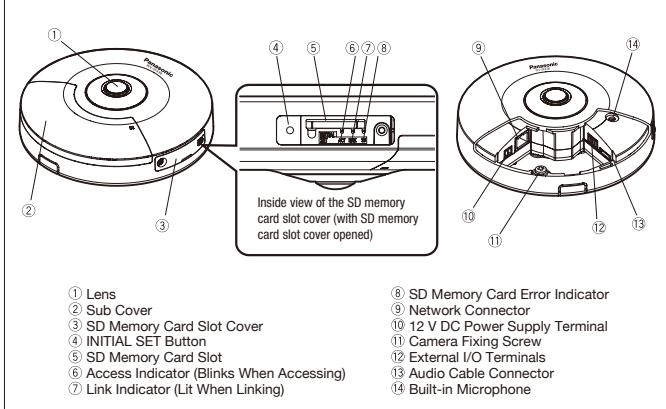

Appearance

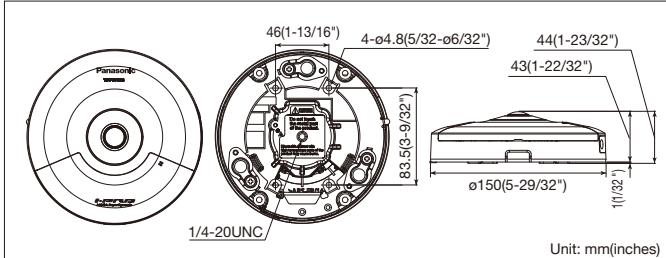

Trademarks and registered trademarks

- Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
 - iPad, iPhone and iPod touch are registered trademarks of Apple Inc.
 - UniPhier is a registered trademark of Panasonic Corporation.
 - "Super Dynamic", "SDI", "SDII", "SD5", "SD5Link", "i-PRO" and "i-PRO SmartHD" logos are

trademark
All other t

- All other trademarks identified herein are the property of their respective owners.

Important

 - Safety Precaution: Carefully read the operating instructions and installation manual before using this product.

- Panasonic

- These products may be subject to export controls.**

- Masses are
- Specifications

- Specifications are subject to change without notice.
 - All product pictures are NTSC models.

DISTRIBUTED BY:

Panasonic

<http://panasonic.net/security/>



<http://www.facebook.com/PanasonicNetworkCamera>

Printed in Japan (2A-101AA)